



# PCI Adapter

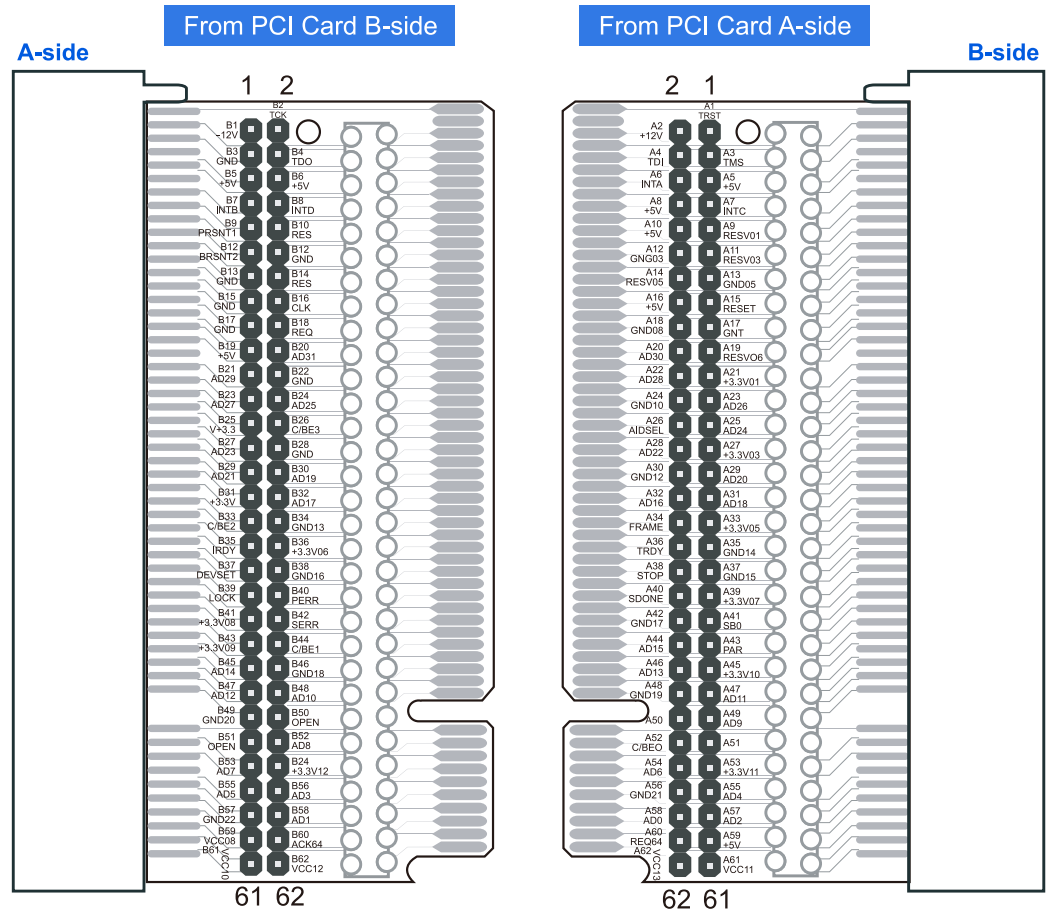

Brief Introduction		Pin	Pin NO	Pin	Pin NO	Pin	Pin NO	Pin	Pin NO	Pin	Pin NO
<ul style="list-style-type: none"> <li>Size : 8.5 cm x 5 cm x 1.8 cm</li> <li>When measuring the PCI signal, you can use the PCI Adapter to get the best measurement and save your time.</li> </ul>		CLK	B16	RESET	A15	AD5	B55	AD15	A44	AD25	B24
		FRAME	A34	C/BE0	A52	AD6	A54	AD16	A32	AD26	A23
<b>Specifications</b> <ul style="list-style-type: none"> <li>Support 32 - bits PCI Card</li> </ul>		TRDY	A36	C/BE1	B44	AD7	B53	AD17	B32	AD27	B23
		IRDY	B35	C/BE2	B33	AD8	B52	AD18	A31	AD28	A22
		DEVSEL	B37	C/BE3	B26	AD9	A49	AD19	B30	AD29	B21
		PAR	A43	AD0	A58	AD10	B48	AD20	A29	AD30	A20
		PERR	B40	AD1	B58	AD11	A47	AD21	B29	AD31	B20
		SERR	B42	AD2	A57	AD12	B47	AD22	A28	--	--
		IDSEL	A26	AD3	B56	AD13	A46	AD23	B27	--	--
		STOP	A38	AD4	A55	AD14	B45	AD24	A25	--	--

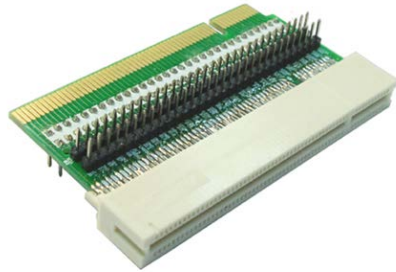

孕龍科技股份有限公司 ZEROPLUS TECHNOLOGY CO., LTD.

23585新北市中和區建八路123號2樓  
 2F., No.123, Jian 8th Rd., Zhonghe Dist., New Taipei City 23585, Taiwan  
 Tel: +886-2-6620-2225 Fax: +886-2-2223-4362  
 Service Mail: service@zeroplus.com.tw

上海市浦东新区张江晨晖路825弄8号101室  
 电话: +86-21-50155235~6 传真: +86-21-50155235 #607

深圳市宝安82区新湖路华美居商务中心A区C座605室  
 电话: +86-755-29556305~6 传真: +86-755-29556306 #613

www.zeroplus.com.tw